

Price list

Bussmann Fusegear Solutions

Effective from 15th March, 2021

Leader in Circuit Protection Solutions



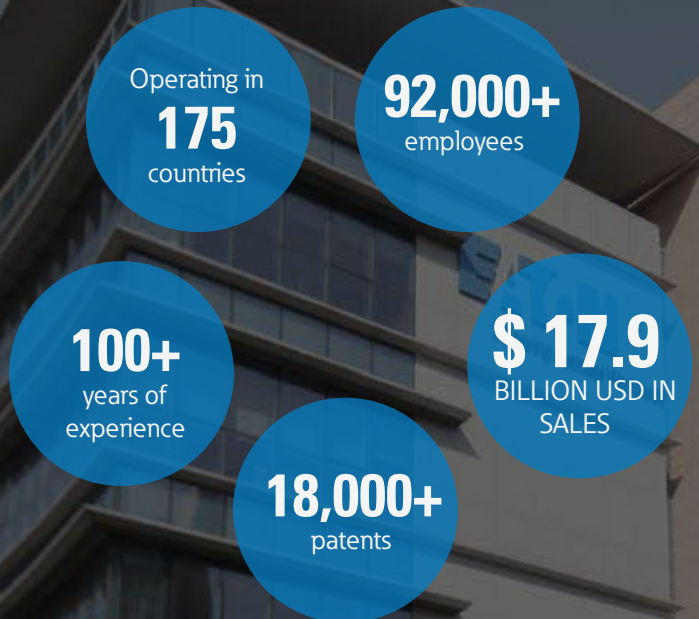
Bussmann
by **EATON**

EatonElectricalIndia@eaton.com

About **EAT•N**

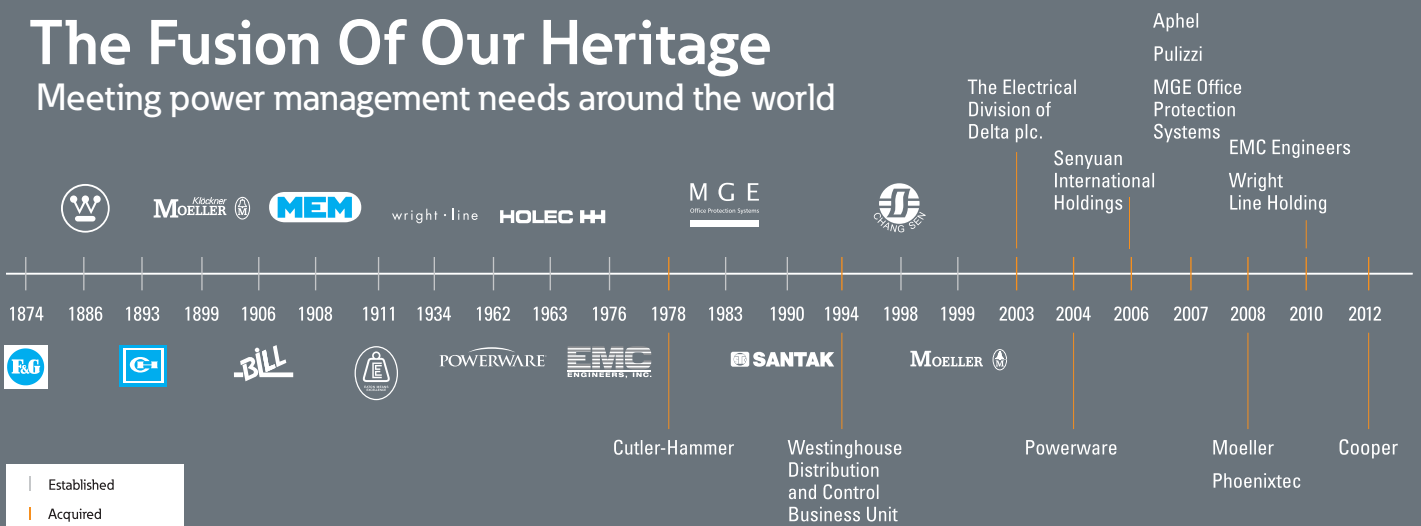
Eaton is a global leading power management company headquartered in USA, serving customers across the world. Our proven technologies enable customers to generate more power using fewer resources, answering the demands of today's fast changing world. Eaton products and services provide the power inside thousands of products and projects – from energy efficient buildings, cities, infrastructure to next generation aircraft, cars, trucks and machines. Eaton is a Fortune 500 company recognized amongst the most admired firms in our industry.

Eaton Power Quality Private Limited, India, is a 100% subsidiary and a part of electrical sector of Eaton Corporation. We are catering to every industrial segment with versatile solutions which includes Switchgear: LV & MV Solutions, Fusegear: LV & MV solutions, UPSs and software solutions.



The Fusion Of Our Heritage

Meeting power management needs around the world



Toll free number: **1800 425 5758, 1800 102 4620**

✉ helpdeskelectrical@eaton.com

Effective 15th March, 2021

Eaton's Product Range

Low Voltage Distribution Products

Air Circuit Breakers	PSL / IZMX
Molded Case Circuit Breakers	PDC / NZM / BZM
Disconnectors	P / PN
Mining Duty Breakers	
ATS	



Contactors

Mini Contactors & Control Relays	DILEM / DILEEM / DILER
Control Relays & Power Contactors	DILM / DILA
Vacuum Contactors	DILM / DILH /V201
4 Pole Contactors	DILMP
Capacitor Duty Contactors	DILK
Lighting Duty Contactors	DILL
DC Mill Duty Contactors	
DC Power Contactors	
Definite Purpose Contactors	



Overload Relays

Thermal Magnetic Overload Relay	ZB/ZE/ZEB
Electronic Overload Relay	Motor Insight, C440
Thermistor Based Overload Relays	EMT6



Motor Protection Circuit Breakers (MPCB)

MPCB with Push Button Control	PKZM01
MPCB with Rotary Handle Control	PKZM0
MPCB with Electronic Release	PKE



Low Voltage Control Products

Pilot Devices (22.5mm & 16mm)	RMQTitan (M22) / A22
Pilot Devices (30.5mm)	E30/E34/10250T
Foot & Palm Switch	FAK
Signal Towers	SL
Pressure Switches	MCS
Position Switches / Safety Switches	LS
Sensors	Inductive / Capacitive / Optical
Limit Switches	Precision / Mini / Metal / Metal-IP67 / Hazardous Applications



Eaton's Product Range

Cam Switches & Switch - Disconnectors

Cam Switches upto 132KW.....	T
Switch-Disconnecter upto 110KW/315A	P
ATEX Rated Enclosures	T/P



Electronic Relays

Safety Relay	ESR5
Safety Control Relays	Easy Safety
Timing Relays	ETR2 / ETR4
Measuring & Monitoring Relays	EMR



Automation Products

Relays	Easy500/700/800
PLC's	XC / EC4
HMI/ HMI-PLC's	XVC
Smartwire Darwin Communication System	



Motor Starters

DOL / RDOL Starter upto 32A with PKZM0	
DOL / RDOL Starter upto 32A with PKE	
Soft Starters upto 900KW.....	S8014/S8114
Variable Speed Starter	DE1
Variable Speed Drive	DG1



Enclosures

IP65, Outdoor rated Polycarbonate Opaque/Transparent	CI / CI-K
MCB Individual Enclosure	AE..
MCCB / Switch Disconnecter	MCCB...
Fuse Enclosure	RS..



Solar Products

Disconnectors upto 60A, 1000V DC rated	
Disconnectors, 160A - 1400A, 1500V DC rated	
Fuse & Fuse Base, 1000V DC	
Inverters upto 1MW	
DC Combiner Boxes	
AC Switchgear	



Effective 15th March, 2021

Price list

Contents

Low Voltage Fuse Links & Fuse Holders	
HRC Fuse Fittings & Bases	6
Low Voltage BS88 Type of Fuse Links	6 - 9
Low Voltage NH Type of Fuse Links	10
Highspeed Voltage Fuse Links	
BS 88 Semi-Conductor Protection, Highspeed Fuses	11 - 12
Accessories for BS 88 Highspeed Fuses	13
Medium Voltage Fuse Links	
BS Type HV Fuses for use in Air	14 - 15
HV Fuses for use in Oil	16
HV Fuses for use in PT/VT & Auxillary Transformer	16
HV Fuses for use in for HV Motor Circuits	17
Fuse Range	
Low Voltage BS88 Type of Fuse Links Range	18 - 21
Highspeed Voltage Fuse Links Range	22
Medium Voltage Fuse Links	23
Cross Reference Chart	
Cross Reference Chart	24

HRC Fuse Fittings & Fuse Bases

Fuse Base for LV NH Type of Fuse

IS / BS Size Reference	Description	No. of Poles	Suitable for Fuse Base Type	Rating (Amps)	Cat. No. / Type	Rated Voltage (Volts)	MRP (₹)	Pack Qty.	MOQ	Delivery Class
00 / C00	Fuse Base	Single	Size 00 and 000	160	SB00-PB	690	320	3	3	O
00 / C00	Top Cover	Single	SB00-PB	160	TC00	690	50	3	3	O
00 / C00	Phase Barrier	Single	SB00-PB	160	IPB00	690	50	6	6	O
00 / C00	Terminal Shield	Single	SB00-PB	160	TS00	690	45	6	6	O




Fuse Fittings for LV BS Type of Fuses

IS / BS Size Reference	Tag Type	Connection Type	Suitable for Fuse Type	Rating (Amps)	Cat. No. / Type	Rated Voltage (Volts)	MRP (₹)	Carton Qty.	MOQ	Delivery Class
F1	Clip on	Front (#)	NSD	20	FA20	500	130	10	10	N
		Front	NSD	32	FA32	500	150	10	10	N
		Back	NSD	32	FB32	500	185	10	10	N
		Busbar	NSD	32	FD32	500	195	10	10	N
A2	Offset Bolted	Front	H07/AAO	32	HA32	500	250	5	5	N
		Busbar	H07/AAO	32	HD32	500	300	5	5	N
A3	Offset Bolted	Front	TO7/BAO/KO7	63	KA63	500	330	5	5	N
		Busbar	TO7/BAO/KO7	63	KD63	500	400	5	5	N
A4	Offset Bolted	Front	L14/KL14/M14	100/125	LA125	500	940	1	1	N
		Busbar	L14/KL14/M14	100/125	LD125	500	1170	1	1	N
F1	Clip on	Front	NSD	32	32NNSF	550	160	10	10	N
		Front	ESD	63	63ENSF	415	1300	5	5	O

Safe lock Range - Screw as wells as DIN Rail fixing (#)

(#) Available on request Busbar / Stud Mounting In White / Grey Body

Low Voltage BS88 - Clip on Type of Fuses


240 / 550 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Breaking Capacity (kA)	Rating (Amps)	Cat. No. / Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class
	E1	SMALL CLIP	240	33	2	SSD2	55	20	20	N
		ON	240	33	4	SSD4	55	20	20	N
			240	33	6	SSD6	55	20	20	N
			240	33	10	SSD10	55	20	20	N
			240	33	16	SSD16	60	20	20	N
			240	33	20	SSD20	60	20	20	N
			240	33	25	SSD25	65	20	20	O
			240	33	32	SSD32	65	20	20	O
	F1	CLIP ON	550	80	2	NSD2	50	20	20	N
		TAG	550	80	4	NSD4	50	20	20	N
			550	80	6	NSD6	50	20	20	N
			550	80	10	NSD10	50	20	20	N
			550	80	16	NSD16	60	20	20	N
			550	80	20	NSD20	60	20	20	N
			550	80	25	NSD25	60	20	20	N
			550	80	32	NSD32	60	20	20	N
	F2	LONG CLIP	550	80	2	ESD2	80	20	20	O
		ON	550	80	4	ESD4	80	20	20	O
			550	80	6	ESD6	80	20	20	O
			550	80	10	ESD10	80	20	20	O
			550	80	16	ESD16	80	20	20	O
			550	80	20	ESD20	80	20	20	O
			550	80	25	ESD25	85	20	20	O
			550	80	32	ESD32	85	20	20	O
			550	80	40	ESD40	110	20	20	O
			550	80	50	ESD50	110	20	20	N
	550	80	63	ESD63	110	20	20	N		

N - Normal; O - On Order

Effective 15th March, 2021



Low Voltage BS88 Type of fuses

Bolted Type, 660/690 Volts range, Breaking Capacity - 80kA

660 / 690 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class	
	A2	OFF SET TAG	660 / 690	2	2HO7-660	80	20	20	N	TIA
		CLOSED SLOT	660 / 690	4	4HO7-660	80	20	20	N	
			660 / 690	6	6HO7-660	80	20	20	N	
			660 / 690	10	10HO7-660	95	20	20	N	
			660 / 690	16	16HO7-660	100	20	20	N	
			660 / 690	20	20HO7-660	100	20	20	N	
			660 / 690	25	25HO7-660	100	20	20	N	
			660 / 690	32	32HO7-660	100	20	20	N	
	A3	OFF SET TAG	660 / 690	35	35KO7-660	160	20	20	N	TIS
		CLOSED SLOT	660 / 690	40	40KO7-660	160	20	20	N	
			660 / 690	50	50KO7-660	160	20	20	N	
			660 / 690	63	63KO7-660	160	20	20	N	
	A4	OFF SET TAG	660 / 690	80	80L14-660	275	10	10	N	TCP
		CLOSED SLOT	660 / 690	100	100L14-660	275	10	10	N	
-	OFF SET TAG	660 / 690	125	125M14-660	560	5	5	N	TFP	
	CLOSED SLOT	660 / 690	160	160M14-660	600	5	5	N		
		660 / 690	200	200M14-660	620	5	5	N		

N - Normal; O - On Order

Bolted Type, 660/690 Volts range, Breaking Capacity - 80kA



660 / 690 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class	
	B1	CENTRE TAG	660 / 690	80	80LO9-660	305	10	10	O	TC
		SINGLE SLOT	660 / 690	100	100LO9-660	310	10	10	N	
	B2	CENTRE TAG	660 / 690	125	125MO9-660	595	5	5	N	TF
		SINGLE SLOT	660 / 690	160	160MO9-660	610	5	5	N	
			660 / 690	200	200MO9-660	665	5	5	N	
	B3	CENTRE TAG	660 / 690	250	250NO9-660	1120	1	1	N	TKF
	SINGLE SLOT	660 / 690	315	315NO9-660	1135	1	1	N		
	C1	CENTRE TAG	660 / 690	355	355P11-660	1360	1	1	O	TMF
		DOUBLE SLOT	660 / 690	400	400P11-660	1370	1	1	O	
	C2	CENTRE TAG	660 / 690	450	450R11-660	1600	1	1	O	TM
		DOUBLE SLOT	660 / 690	500	500R11-660	1600	1	1	O	
			660 / 690	560	560R11-660	1920	1	1	O	TTM
			660 / 690	630	630R11-660	1920	1	1	O	

N - Normal; O - On Order

Effective 15th March, 2021


Low Voltage BS88 Type of fuses

Bolted Type, 550 Volts range, Breaking Capacity - 80kA

550 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class	
	-	OFFSET TAG	550	2	NITD2	70	20	20	N	NIT
		OPEN SLOT	550	4	NITD4	70	20	20	N	
			550	6	NITD6	70	20	20	N	
			550	10	NITD10	70	20	20	N	
			550	16	NITD16	70	20	20	N	
			550	20	NITD20	70	20	20	N	
			550	25	NITD25	75	20	20	O	
		550	32	NITD32	75	20	20	O		
	A2	OFFSET TAG	550	2	AAO2	65	20	20	N	TSA
		CLOSED SLOT	550	4	AAO4	65	20	20	O	
			550	6	AAO6	70	20	20	N	
			550	10	AAO10	70	20	20	N	
			550	16	AAO16	70	20	20	N	
			550	20	AAO20	75	20	20	N	
			550	25	AAO25	75	20	20	N	
	A3	OFFSET TAG	550	35	BAO35	125	20	20	N	TSS
		CLOSED SLOT	550	40	BAO40	125	20	20	N	
			550	50	BAO50	125	20	20	N	
			550	63	BAO63	125	20	20	N	TSDS
	-	OFFSET TAG	550	80	OSD80	250	20	20	N	
		CLOSED SLOT	550	100	OSD100	350	20	20	N	

N - Normal; O - On Order

Bolted Type, 550 Volts range, Breaking Capacity - 80kA

550 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class	
	C2	CENTRE TAG	550	450	FF450	1900	1	1	O	TST
		DOUBLE SLOT	550	500	FF500	2000	1	1	O	
			550	560	FF560	2200	1	1	O	
			550	630	FF630	2400	1	1	O	
	C3	CENTRE TAG	550	710	GF710	2550	1	1	O	TLM
		DOUBLE SLOT	550	800	GF800	2550	1	1	O	
	-	CENTRE TAG	550	710	GG710	#	1	3	O	TLT
		DOUBLE SLOT	550	800	GG800	#	1	3	O	
			550	1000	GG1000	#	1	3	O	
			550	1250	GG1250	#	1	3	O	



- Price Available on request

N - Normal; O - On Order

Effective 15th March, 2021



Low Voltage BS88 Type of fuses

Bolted Type, 415 Volts range, Breaking Capacity - 80kA

415 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class		
	-	OFFSET TAG	550	2	EITD2	80	20	20	N	EIT	
		OPEN SLOT	550	4	EITD4	80	20	20	N		
			550	6	EITD6	80	20	20	N		
			550	10	EITD10	80	20	20	N		
			550	16	EITD16	95	20	20	N		
			550	20	EITD20	95	20	20	N		
			550	25	EITD25	95	20	20	N		
			550	32	EITD32	95	20	20	N		
			415	40	EITD40	105	20	20	N		
			415	50	EITD50	105	20	20	N		
			415	63	EITD63	110	20	20	N	TSD TSFP TSDC TSF TSF/ TSK TSK/ TSM	
	A4	OFFSET TAG	415	32	CEO32	200	10	10	O		
		CLOSED SLOT	415	40	CEO40	200	10	10	O		
			415	50	CEO50	225	10	10	O		
			415	63	CEO63	225	10	10	O		
			415	80	CEO80	250	10	10	N		
			415	100	CEO100	330	10	10	N		
	-	OFFSET TAG	415	125	DEO125	300	5	5	N		
		CLOSED SLOT	415	160	DEO160	320	5	5	N		
			415	200	DEO200	350	5	5	O		
	B1	CENTRE TAG	415	80	CD80	250	10	10	O		
		SINGLE SLOT	415	100	CD100	415	10	10	N		
	B2	CENTRE TAG	415	125	DD125	320	5	5	N		
		SINGLE SLOT	415	160	DD160	320	5	5	N		
			415	200	DD200	350	5	5	N		
	B3 / B4	CENTRE TAG	415	250	ED250	750	1	1	N		TSF/ TSK
		SINGLE SLOT	415	315	ED315	825	1	1	N		
	B4	CENTRE TAG	415	355	ED355	825	1	1	O		TSK/ TSM
SINGLE SLOT		415	400	ED400	860	1	1	N			

N - Normal; O - On Order

Bolted Type, 415 Volts range, Breaking Capacity - 80kA


415 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class		
	-	CENTRE TAG	415	355	355SN11(S)	950	1	1	O	TSMS	
		SINGLE SLOT	415	400	400SN11(S)	1000	1	1	N		
	-	CENTRE TAG	415	450	450SP11(S)	1300	1	1	O	TSTS	
		SINGLE SLOT	415	500	500SP11(S)	1500	1	1	O		
	-	CENTRE TAG	415	560	560SR11(S)	2000	1	1	O	TSL	
		SINGLE SLOT	415	630	630SR11(S)	2300	1	1	N		
				415	710	710SR11(S)	-	1	1		O
				415	800	800SR11(S)	2550	1	1		N
	C1	CENTRE TAG	415	355	EF355	1600	1	1	O	TSM	
		DOUBLE SLOT	415	400	EF400	1650	1	1	O		
	-	CENTRE TAG	415	710	710SR11	2700	1	1	O	TSL	
		DOUBLE SLOT	415	800	800SR11	3000	1	1	N		

N - Normal; O - On Order

Effective 15th March, 2021

Low Voltage DIN Type, NH Dual Indicator Fuse Links

Rated Voltage 500 Volts AC, Breaking Capacity - 120 kA

500 Vac	Size	Rated Current (A)	Class gL-gG with Dual Indication & Metal Grips	MRP (₹)	Carton Qty.	MOQ	Delivery Class
	000	2	2NHG000B	300	3	3	N
		4	4NHG000B	300	3	3	N
		6	6NHG000B	300	3	3	N
		10	10NHG000B	300	3	3	N
		16	16NHG000B	300	3	3	N
		20	20NHG000B	320	3	3	N
		25	25NHG000B	320	3	3	N
		32	32NHG000B	320	3	3	N
		35	35NHG000B	320	3	3	O
		40	40NHG000B	350	3	3	N
		50	50NHG000B	350	3	3	N
		63	63NHG000B	350	3	3	N
		80	80NHG000B	370	3	3	N
		100	100NHG000B	370	3	3	N
	00	63	63NHG00B	415	3	3	N
		80	80NHG00B	430	3	3	N
		100	100NHG00B	450	3	3	N
		125	125NHG00B	470	3	3	N
	0 [®]	160	160NHG00B	480	3	3	O
		50	50NHG0B	550	3	3	O
		63	63NHG0B	565	3	3	O
		80	80NHG0B	580	3	3	O
	0 ^s	100	100NHG0B	595	3	3	O
		125	125NHG0B	620	3	3	O
		160	160NHG0B	635	3	3	O
		200	200NHG0B	650	3	3	O
	01 [®]	100	100NHG01B	615	3	3	O
		125	125NHG01B	630	3	3	O
		160	160NHG01B	650	3	3	O
		200	200NHG1B	670	3	3	N
		224	224NHG1B	670	3	3	O
		250	250NHG1B	725	3	3	N
		315 [#]	315NHG1B [#]	900	3	3	O
		355	355NHG1B	915	3	3	O
		35	35NHG02B	760	3	3	O
		40	40NHG02B	760	3	3	O
	02	50	50NHG02B	760	3	3	O
		63	63NHG02B	760	3	3	O
		80	80NHG02B	780	3	3	O
		100	100NHG02B	800	3	3	O
		125	125NHG02B	815	3	3	O
		160	160NHG02B	830	3	3	O
		200	200NHG02B	845	3	3	O
		224	224NHG02B	845	3	3	O
		250	250NHG02B	865	3	3	O
		315	315NHG2B	990	3	3	N
	2	355	355NHG2B	1000	3	3	O
		400	400NHG2B	1020	3	3	N
		250	250NHG03B	1340	3	3	O
		315	315NHG03B	1370	3	3	O
	03	355	355NHG03B	1390	3	3	O
		400	400NHG03B	2000	3	3	O
		425	425NHG3B	1450	3	3	O
		450	450NHG3B	1450	3	3	O
	3	500	500NHG3B	1565	3	3	N
		630	630NHG3B	1580	3	3	N
		800 [#]	800NHG3B [#]	2170	3	3	N

@ Size "0", 6A - 63A on request

Size "1" 80A-160A on request

Insulated grip version available on request

Size "01", 6A - 80A on request

Rated Voltage 440V




500/ 630/ 800/ 1000/ 1250 Amp | 500 V | Size 4 available on request

* Available in Single Indicator type only

N - Normal; O - On Order



HRC High Speed Fuses - Semi Conductor Protection Fuses - BS88 Type

Rated Voltage 240 Volts AC, Breaking Capacity - 200 kA

240 Vac	Voltage (V)	Rating (Amps)	Catalogue No. / Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class
	240	6	6LCT	180	20	20	N
	240	10	10LCT	180	20	20	N
	240	12	12LCT	180	20	20	O
	240	16	16LCT	180	20	20	N
	240	20	20LCT	180	20	20	N
	240	25	25LET	325	10	10	N
	240	32	32LET	340	10	10	N
	240	35	35LET	340	10	10	O
	240	50	50LET	360	10	10	N
	240	63	63LET	360	10	10	N
	240	80	80LET	380	10	10	N
	240	100	100LET	380	10	10	O
	240	125	125LET	400	10	10	N
	240	160	160LET	415	10	10	N
	240	160	160LMT	660	1	1	N
	240	200	200LMT	700	1	1	N
	240	250	250LMT	850	1	1	N
	240	315	315LMT	1200	1	1	N
	240	355	355LMT	1280	1	1	N
	240	400	400LMT	1350	1	1	N
	240	450	450LMT	1555	1	1	N
	240	400	400LMMT	1800	1	1	O
	240	500	500LMMT	1950	1	1	O
	240	630	630LMMT	2145	1	1	O
	240	710	710LMMT	2265	1	1	O
	240	800	800LMMT	2700	1	1	O
	240	900	900LMMT	3015	1	1	O

N - Normal; O - On Order

Rated Voltage 240 Volts AC, Breaking Capacity - 200 kA








240 Vac	Voltage (V)	Rating (Amps)	Catalogue No. / Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class
	690	6	6CT	185	20	20	N
	690	10	10CT	185	20	20	N
	690	12	12CT	185	20	20	O
	690	16	16CT	200	20	20	N
	690	20	20CT	200	20	20	N
		690	15	15ET	395	10	10
690		25	25ET	395	10	10	N
690		32	32ET	395	10	10	N
690		35	35ET	395	10	10	N
690		40	40ET	395	10	10	N
690		45	45ET	395	10	10	N
690		56	56ET	440	10	10	N
690		63	63ET	440	10	10	N
690		80	80ET	445	10	10	N

N - Normal; O - On Order

Effective 15th March, 2021

HRC High Speed Fuses - Semi Conductor Protection Fuses - BS88 Type

Rated Voltage 690 Volts AC / 240 Volts DC, Breaking Capacity - 200 kA

690 Vac	Voltage (V)	Rating (Amps)	Catalogue No. / Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class
	690	35	35FE	425	10	10	N
	690	40	40FE	425	10	10	O
	690	45	45FE	425	10	10	N
	690	50	50FE	425	10	10	N
	690	63	63FE	475	10	10	N
	690	71	71FE	490	10	10	O
	690	80	80FE	525	10	10	N
	690	90	90FE	620	10	10	N
	690	75	75EET	945	5	5	O
	690	90	90EET	945	5	5	N
	690	110	110EET	945	5	5	N
	690	140	140EET	945	5	5	N
	690	160	160EET	965	5	5	N
	690	100	100FEE	990	5	5	N
	690	120	120FEE	1035	5	5	N
	690	140	140FEE	1070	5	5	N
	690	160	160FEE	1090	5	5	N
	690	180	180FEE	1110	5	5	O
	690	200	200FEE	1145	5	5	N
	690	160	160MT	840	1	1	N
	690	180	180MT	880	1	1	N
	690	200	200MT	1105	1	1	N
	690	250	250MT	1130	1	1	N
	690	280	280MT	1215	1	1	N
	690	315	315MT	1585	1	1	N
	690	355	355MT	1615	1	1	N
	690	180	180MMT	1570	1	1	N
	690	200	200MMT	1650	1	1	N
	690	225	225MMT	1700	1	1	N
	690	280	280MMT	1750	1	1	N
	690	315	315MMT	1745	1	1	N
	690	355	355MMT	2010	1	1	N
	690	400	400MMT	2090	1	1	N
	690	450	450MMT	2250	1	1	N
	690	500	500MMT	2500	1	1	N
	690	560	560MMT	2735	1	1	N
	690	630	630MMT	2840	1	1	N
	690	180	180FM	880	1	1	O
	690	200	200FM	995	1	1	N
	690	225	225FM	1040	1	1	N
	690	250	250FM	1050	1	1	N
	690	280	280FM	1180	1	1	O
	690	315	315FM	1610	1	1	N
	690	350	350FM	1670	1	1	N
	690	400	400FMM	1795	1	1	N
	690	450	450FMM	1870	1	1	N
	690	500	500FMM	2115	1	1	N
	690	550	550FMM	2250	1	1	N
	690	630	630FMM	2630	1	1	N
	690	700	700FMM	2900	1	1	N

N - Normal; O - On Order

Effective 15th March, 2021

Accessories

Catalogue No. / Type	Trip Indicator accessory pack (each consists of 1 pair of clip & appropriate size Trip Indicator Fuse Link)	MRP (₹)	Pack Quantity	Delivery Class
EC-250	For use with LET	700	1 set	O
EC-600	For use with ET, EET, FE & FEE	750	1 set	O
MC-250	For use with LMT & LMMT	700	1 set	O
MC-600	For use with FM & FMM	750	1 set	O
MC-700	For use with MT & MMT	790	1 set	O

Catalogue No. / Type	Micro - Switch	MRP (₹)	Pack Quantity	Delivery Class
MAI	Micro-switch & Adapter assly.	910	1	O
MBI	Micro-switch & Adapter assly.	#	1	O

- Price Available on request

Catalogue No. / Type	Fuse Clips for Fitting Trip Indicator	MRP (₹)	Pack Quantity	Delivery Class
ECLIP	For use with LET, ET, EET, FE & FEE	120	10	O
MCLIP	For use with LMT, LMMT, MT, MMT, FM & FMM	260	10	O
CL1	Back connected Clip for use with Trip Indicator fuse	880	1 set	O

Catalogue No. / Type	Trip Indicators for Fuse Links	MRP (₹)	Pack Quantity	Delivery Class
TI250-BT	For use with LET, LMT & LMMT	680	10	O
TI500-BT	For use with ET, EET, FE & FEE, FM & FMM	700	1	O
TI600-BT	For use with ET, EET, FE & FEE, FM & FMM	730	1	O
TI700-BT	For use with MT & MMT	870	1	O
TI1100-BT	For replacement only	970	1	O
TI1500-BT	For replacement only	1000	1	O
TI2000-BT	For replacement only	1100	1	O

N - Normal; O - On Order


NH Fuse base

Catalogue No. / Type	Description	MRP (₹)	Pack Quantity	Delivery Class
SD1-S	NH Fuse base 250A, 690VAC DIN Size 1 (Screw Mounting)	855	3	O
SD2-S	NH Fuse base 400A, 690VAC DIN Size 2 (Screw Mounting)	1200	3	O
SD3-S	NH Fuse base 630A, 690VAC DIN Size 3 (Screw Mounting)	1850	3	O
SD4-S	NH Fuse base 1250A, 690VAC DIN Size 4 (Screw Mounting)	4180	1	O

N - Normal; O - On Order

Effective 15th March, 2021

British Standard Type Range of Fuses for use in Air.

	Application (used in)	Voltage (Kv)	Breaking Capacity (kA)	Ratings (Amps)	Catalogue No. / Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class
		3.3 / 3.6	25	15	3.6ADGHC15	3475	1	1	O
		3.3 / 3.6	25	20	3.6ADGHC20	3475	1	1	O
		3.3 / 3.6	25	25	3.6ADGHC25	3475	1	1	O
		3.3 / 3.6	25	30	3.6ADGHC30	3475	1	1	O
		3.3 / 3.6	25	40	3.6ADGHC40	3475	1	1	O
		3.3 / 3.6	25	45	3.6ADGHC45	3475	1	1	O
		3.3 / 3.6	25	50	3.6ADGHC50	3475	1	1	O
		3.3 / 3.6	25	60	3.6ADGHC60	3475	1	1	O
		3.3 / 3.6	25	70	3.6ADGHC70	3475	1	1	O
		3.3 / 3.6	25	75	3.6ADGHC75	3850	1	1	O
	Air (Bus Duct / Distribution/ Capacitors)	6.6 / 7.2	40	10	7.2BDGHC10	3520	1	1	O
		6.6 / 7.2	40	16	7.2BDGHC16	3520	1	1	O
		6.6 / 7.2	40	20	7.2BDGHC20	3520	1	1	O
		6.6 / 7.2	40	25	7.2BDGHC25	3520	1	1	O
		6.6 / 7.2	40	31.5	7.2BDGHC31.5	3520	1	1	O
		6.6 / 7.2	40	35.5	7.2BDGHC35.5	3520	1	1	O
		6.6 / 7.2	40	40	7.2BDGHC40	3520	1	1	O
		6.6 / 7.2	40	45	7.2BDGHC45	3580	1	1	O
		6.6 / 7.2	40	50	7.2BDGHC50	3580	1	1	O
		6.6 / 7.2	40	56	7.2BDGHC56	3580	1	1	O
	Air (Bus Duct / Distribution/ Capacitors)	6.6 / 7.2	40	60	7.2BDGHC60	3580	1	1	O
		6.6 / 7.2	40	63	7.2BDGHC63	3810	1	1	O
		6.6 / 7.2	40	71	7.2BDGHC71	3835	1	1	O
		6.6 / 7.2	40	80	7.2BDGHC80	3835	1	1	O
		6.6 / 7.2	40	50	7.2AHGHC50	4300	1	1	O
		6.6 / 7.2	40	60	7.2AHGHC60	4380	1	1	O
		6.6 / 7.2	40	75	7.2AHGHC75	4610	1	1	O
		6.6 / 7.2	40	90	7.2AHGHC90	4875	1	1	O
		6.6 / 7.2	40	100	7.2AHGHC100	4895	1	1	O
		6.6 / 7.2	40	112	7.2AHGHC112	5685	1	1	O
		6.6 / 7.2	40	125	7.2AHGHC125	5910	1	1	O
		6.6 / 7.2	40	140	7.2AHGHC140	6440	1	1	O
		6.6 / 7.2	40	150	7.2AHGHC150	6440	1	1	O
		6.6 / 7.2	40	160	7.2AHGHC160	6625	1	1	N
		6.6 / 7.2	40	160	7.2AHGNB160 (NS)	6170	1	1	O
		6.6 / 7.2	40	50	7.2AHGHB50	4235	1	1	O
		6.6 / 7.2	40	60	7.2AHGHB60	4235	1	1	O
		6.6 / 7.2	40	65	7.2AHGHB65	4460	1	1	O
		6.6 / 7.2	40	75	7.2AHGHB75	4510	1	1	O
		6.6 / 7.2	40	90	7.2AHGHB90	4720	1	1	N
6.6 / 7.2	40	100	7.2AHGHB100	4740	1	1	O		
		6.6 / 7.2	40	112	7.2AHGHB112	5505	1	1	O
		6.6 / 7.2	40	120	7.2AHGHB120	5730	1	1	O
		6.6 / 7.2	40	125	7.2AHGHB125	5730	1	1	O
		6.6 / 7.2	40	140	7.2AHGHB140	6255	1	1	O
		6.6 / 7.2	40	150	7.2AHGHB150	6255	1	1	O
		6.6 / 7.2	40	160	7.2AHGHB160	6255	1	1	O
		6.6 / 7.2	20	30	7.2AEFMO30	4410	1	1	O
		6.6 / 7.2	20	35	7.2AEFMO35	4410	1	1	O
		6.6 / 7.2	20	40	7.2AEFMO40	4410	1	1	O
		6.6 / 7.2	20	50	7.2AEFMO50	4450	1	1	O
6.6 / 7.2	20	56	7.2AEFMO56	4450	1	1	O		
6.6 / 7.2	20	63	7.2AEFMO63	4450	1	1	O		
6.6 / 7.2	20	71	7.2AEFMO71	4475	1	1	O		
6.6 / 7.2	20	80	7.2AEFMO80	4475	1	1	O		
6.6 / 7.2	20	90	7.2AEFMO90	4570	1	1	O		

(#) Available on request
(NS) Non striker

N - Normal; O - On Order

For ordering HV Air Fuse with Single Slot9

- 1 - For BD _____ series, add "S" at the end of the cat. number. For ex : For ordering 100A, 7.2BFGHD catalogue no. will be "7.2BFGHD100S"
- 2 - For AH _____ series, replace "C" at end with "B" For ex : For ordering 100A, 7.2AHGH series, catalogue no. will be "7.2AHGHB100"
- 3 - For "7.2BFGHD" _____ series, completely replaced with "7.2AHGHB".

Effective 15th March, 2021

British Standard Type Range of Fuses for use in Air.

	Application (used in)	Voltage (Kv)	Breaking Capacity (kA)	Ratings (Amps)	Catalogue No. / Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class		
		11 / 12	40	6.3	12BDGHC6.3	4135	1	1	O		
		11 / 12	40	10	12BDGHC10	4135	1	1	O		
		11 / 12	40	16	12BDGHC16	4135	1	1	O		
		11 / 12	40	20	12BDGHC20	3920	1	1	O		
		11 / 12	40	25	12BDGHC25	3785	1	1	N		
		11 / 12	40	31.5	12BDGHC31.5	3810	1	1	O		
		11 / 12	40	35.5	12BDGHC35.5	3810	1	1	O		
		11 / 12	40	40	12BDGHC40	3835	1	1	O		
		11 / 12	40	45	12BDGHC45	3835	1	1	O		
	Air (Bus Duct / Distribution)	11 / 12	40	50	12BDGHC50	3865	1	1	O		
		11 / 12	40	56	12AHGHC56	4425	1	1	O		
		11 / 12	40	63	12AHGHC63	4425	1	1	N		
		11 / 12	40	70	12AHGHC70	4485	1	1	O		
		11 / 12	40	80	12AHGHC80	4855	1	1	N		
		11 / 12	40	90	12AHGHC90	4810	1	1	O		
		11 / 12	40	100	12AHGHC100	4855	1	1	O		
		11 / 12	40	56	12AHGHB56	4445	1	1	O		
		11 / 12	40	63	12AHGHB63	4490	1	1	N		
		11 / 12	40	65	12AHGHB65	4670	1	1	O		
		11 / 12	40	70	12AHGHB70	4670	1	1	N		
		11 / 12	40	80	12AHGHB80	4885	1	1	O		
		11 / 12	40	90	12AHGHB90	4985	1	1	O		
		11 / 12	40	100	12AHGHB100	4985	1	1	N		
		11 / 12	40	112	12AKGHD112	11425	3	3	O		
		11 / 12	40	125	12AKGHD125	11205	1	1	O		
				11 / 12	20	3.7	12AEFMO3.7	4435	1	1	O
				11 / 12	20	12	12AEFMO12	4395	1	1	O
				11 / 12	20	15	12AEFMO15	4395	1	1	O
11 / 12	20			16.8	12AEFMO16.8	4395	1	1	O		
11 / 12	20			22	12AEFMO22	4420	1	1	O		
11 / 12	20			26.6	12AEFMO26.6	4420	1	1	O		
11 / 12	20			30	12AEFMO30	4420	1	1	O		
11/12	20			33.75	12AEFMO33.75	4420	1	1	O		
11 / 12	20			37.5	12AEFMO37.5	4420	1	1	O		
11 / 12	20			42	12AEFMO42	4465	1	1	O		
11 / 12	20			47.25	12AEFMO47.25	4465	1	1	O		



(#) Available on request

N - Normal; O - On Order

For ordering HV Air Fuse with Single Slot -
1 - For "12BFGHD" ___ series, completely replaced with "12AHGHB".




High Voltage Fuses

For use in Oil

	Application (used in)	Voltage (Kv)	Breaking Capacity (kA)	Ratings (Amps)	Catalogue No. / Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class
	Oil	6.6 / 7.2	45	100	7.2OEFMA100	4020	1	1	O
	Oil	11 / 12	40	6.3	12OEFMA6.3	4370	3	3	O
		11 / 12	40	10	12OEFMA10	4370	3	3	O
		11 / 12	40	16	12OEFMA16	4370	3	3	O
		11 / 12	40	20	12OEFMA20	4380	3	3	O
		11 / 12	40	25	12OEFMA25	4380	3	3	O
		11 / 12	40	31.5	12OEFMA31.5	4380	3	3	O
		11 / 12	40	40	12OEFMA40	4395	3	3	O
		11 / 12	40	50	12OEFMA50	4395	3	3	O
		11 / 12	40	63	12OEFMA63	4395	3	3	O
11 / 12		40	71	12OHFMA71	4540	3	3	O	
11 / 12		40	80	12OHFMA80	4540	3	3	O	
		11 / 12	40	16	12OHGMA16	5335	3	3	O
		11 / 12	40	25	12OHGMA25	5365	3	3	O
		11 / 12	40	31.5	12OHGMA31.5	5365	3	3	O
		11 / 12	40	40	12OHGMA40	5390	3	3	O
		11 / 12	40	50	12OHGMA50	5390	3	3	O
		11 / 12	40	63	12OHGMA63	5390	3	3	O
		11 / 12	40	80	12OHGMA80	5390	3	3	O
		11 / 12	40	90	12OHGMA90	5595	3	3	O
	11 / 12	40	100	12OHGMA100	6115	3	3	O	
	11 / 12	40	125	12OLGMA125	6875	3	3	O	

N - Normal; O - On Order



For use in PT / VT & Auxiliary Transformer

	Application (used in)	Voltage (Kv)	Breaking Capacity (kA)	Ratings (Amps)	Catalogue No. / Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class
	VT / PT	3.3 / 3.6	50	3.15	3.6ABWNA3.15	875	1	1	N
		3.3 / 3.6	50	6.3	3.6ABWNA6.3	875	1	1	O
		6.6 / 7.2	45	3.15	7.2ABCNA3.15	955	1	1	N
		6.6 / 7.2	45	6.3	7.2ABCNA6.3	955	1	1	O
		6.6 / 7.2	45	3.15	7.2ABWNA3.15	940	1	1	O
		6.6 / 7.2	45	6.3	7.2ABWNA6.3	940	1	1	O
		11 / 12	45	3.15	12ABCNA3.15	965	1	1	N
		22 / 24	25	3.15	24ABGNA3.15	2210	1	1	N
	VT / PT	33 / 36	31.5	3.15	36ABQNA3.15	3185	1	1	N
		3.3 / 3.6	50	3.15	3.6ABWNS3.15	940	1	1	O
		6.6 / 7.2	45	3.15	7.2ABCNS3.15	1040	1	1	O
	VT / PT	11 / 12	45	3.15	12ABCNS3.15	1120	1	1	O
		3.3 / 3.6	50	3.15	3.6ABWNT3.15	1075	1	1	O
		6.6 / 7.2	45	3.15	7.2ABCNT3.15	985	1	1	O
		11 / 12	45	3.15	12ABCNT3.15	1135	1	1	O

N - Normal; O - On Order

Effective 15th March, 2021

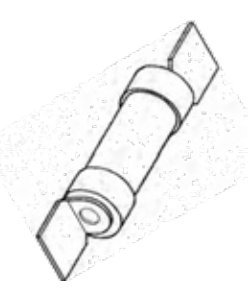
British Standard Type Range of Fuses for use in Motor Circuits

	Application (used in)	Voltage (Kv)	Breaking Capacity (kA)	Ratings (Amps)	Catalogue No. / Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class
	For use in MV Motor Circuits	3.6	50	5	3.6WDOHS5	3855	1	1	O
		3.6	50	16	3.6WDOHS16	3855	1	1	O
		3.6	50	20	3.6WDOHS20	3855	1	1	N
		3.6	50	25	3.6WDOHS25	3855	1	1	O
		3.6	50	32	3.6WDOHS32	3820	1	1	N
		3.6	50	40	3.6WDOHS40	3820	1	1	O
		3.6	50	50	3.6WDOHS50	3860	1	1	O
		3.6	50	63	3.6WDOHS63	3895	1	1	N
		3.6	50	80	3.6WDOHS80	3895	1	1	O
		3.6	50	50	3.6WDFMO50	5475	1	1	O
		3.6	50	63	3.6WDFMO63	5635	1	1	O
		3.6	50	80	3.6WDFMO80	5635	1	1	O
		3.6	50	100	3.6WDFMO100	5635	1	1	O
		3.6	50	100	3.6WFFMO100	7065	1	1	O
		3.6	50	140	3.6WFFMO140	7875	1	1	O
		3.6	50	160	3.6WFFMO160	8095	1	1	O
		3.6	50	200	3.6WFFMO200	8775	1	1	N
		3.6	50	250	3.6WFFMO250	9940	1	1	O
		3.6	50	315	3.6WFFMO315	11485	1	1	O
		3.6	50	350	3.6WFFMO350	12710	1	1	O
3.6	50	450	3.6WFFMO450	19110	1	1	O		
3.6	50	630	3.6WKFMO630	24500	1	1	O		
	For use in MV Motor Circuits	7.2	45	50	7.2WFNMO50	7860	1	1	O
		7.2	45	63	7.2WFNMO63	7860	1	1	O
		7.2	45	80	7.2WFNMO80	9285	1	1	O
		7.2	45	100	7.2WFNMO100	9285	1	1	O
		7.2	45	125	7.2WFNMO125	10740	1	1	O
		7.2	45	160	7.2WFNMO160	10840	1	1	O
		7.2	45	200	7.2WFNMO200	12405	1	1	O
		7.2	45	250	7.2WFNMO250	14675	1	1	O
		7.2	45	50	7.2WFQMO50	8570	1	1	N
		7.2	45	63	7.2WFQMO63	8650	1	1	N
		7.2	45	80	7.2WFQMO80	9580	1	1	N
		7.2	45	100	7.2WFQMO100	10170	1	1	N
		7.2	45	125	7.2WFQMO125	11865	1	1	N
		7.2	45	160	7.2WFQMO160	11970	1	1	O
		7.2	45	200	7.2WFQMO200	13505	1	1	O
		7.2	45	250	7.2WFQMO250	16725	1	1	O
		7.2	45	350	7.2WKQMO350	22585	1	1	O
		7.2	45	400	7.2WKQMO400	38060	1	1	O

N - Normal; O - On Order

BS Fuse link Type SS/NS/ES


Clip-on Fuse links with Staggered Tags-415 V AC

415 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class	
	E1	SMALL CLIP ON	415	2	SS2	55	20	20	O	SSD
		TAG	415	4	SS4	55	20	20	N	
			415	6	SS6	55	20	20	N	
			415	10	SS10	55	20	20	O	
			415	16	SS16	60	20	20	O	
			415	20	SS20	60	20	20	O	
	F1	CLIP ON	415	2	NS2	50	20	20	N	NSD
		TAG	415	4	NS4	50	20	20	N	
			415	6	NS6	50	20	20	N	
			415	10	NS10	50	20	20	N	
			415	16	NS16	55	20	20	N	
			415	20	NS20	55	20	20	N	
			415	25	NS25	55	20	20	N	
	F2	LONG CLIP ON	415	2	ES2	75	20	20	O	ESD
		TAG	415	4	ES4	75	20	20	O	
			415	6	ES6	75	20	20	O	
			415	10	ES10	75	20	20	O	
			415	16	ES16	75	20	20	O	
			415	20	ES20	75	20	20	O	
			415	25	ES25	80	20	20	O	
			415	32	ES32	80	20	20	O	
		415	36	ES36	80	20	20	O		
		415	50	ES50	105	20	20	N		
	415	63	ES63	110	20	20	N			

N - Normal; O - On Order

BS Fuse link Type EIT.

Fuse link with Offset Tags

415 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class	
		OFFSET TAG	415	2	EIT2	85	20	20	O	EITD
		OPEN SLOT	415	4	EIT4	85	20	20	O	
			415	6	EIT6	85	20	20	N	
			415	10	EIT10	85	20	20	N	
			415	16	EIT16	85	20	20	N	
			415	20	EIT20	90	20	20	N	
			415	25	EIT25	90	20	20	N	
			415	32	EIT32	90	20	20	N	
			415	36	EIT36	105	20	20	O	
			415	50	EIT50	105	20	20	O	
			415	63	EIT63	110	20	20	N	



Note: Please discuss with Eaton sales team before placing any orders for these set of products.

N - Normal; O - On Order

Effective 15th March, 2021

Type - TSA / TSS / TSDS / TSD / TSFP


Fuse link with Offset Tags Closed Slot

415 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class		
	A2	OFFSET TAG	415	6	TSA6	60	20	20	O	AAO	
		CLOSED SLOT	415	10	TSA10	60	20	20	O		
			415	16	TSA16	60	20	20	N		
			415	20	TSA20	65	20	20	O		
			415	25	TSA25	65	20	20	N		
			415	32	TSA32	65	20	20	N		
	A3	OFFSET TAG	415	36	TSS36	110	20	20	N	BAO	
		CLOSED SLOT	415	50	TSS50	115	20	20	N		
			415	63	TSS63	125	20	20	N		
	-	OFFSET TAG	415	80	TSDS80	230	10	10	N	OSD	
		CLOSED SLOT	415	100	TSDS100	230	10	10	N		
			415	125	TSDS125	250	10	10	N		
	A4	OFFSET TAG	415	80	TSD80	190	10	10	N	CEO	
		CLOSED SLOT	415	100	TSD100	205	10	10	N		
				415	125	TSD125	260	10	10	N	DEO
		-	OFFSET TAG	415	125	TSFP125	305	10	10	O	
			CLOSED SLOT	415	160	TSFP160	320	10	10	N	
			415	200	TSFP200	330	10	10	O		

N - Normal; O - On Order

Type - TSDC \ TSK \ TSMS \ TSTS \ TSL

Fuse Links with Centre Tag Single Slot

415 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class		
	B1	Centre Tag	415	80	TSDC80	240	10	10	O	CD	
		Single Slot	415	100	TSDC100	240	10	10	N		
	B3	Centre Tag	415	250	TSK250	545	10	10	N	ED	
		Single Slot	415	315	TSK315	560	10	10	N		
	C1	Centre Tag	415	355	TSMS355	825	1	1	O	SN11(S)	
		Single Slot	415	400	TSMS400	980	1	1	N		
	-	Centre Tag	415	450	TSTS450	1120	1	1	O	SP11(S)	
		Single Slot	415	500	TSTS500	1120	1	1	O		
	-	Centre Tag	415	560	TSL560	1950	1	1	O	SR11(S)	
		Single Slot	415	630	TSL630	2115	1	1	O		
				415	710	TSL710	2085	1	1	O	
				415	750	TSL750	2100	1	1	O	
			415	800	TSL800	2150	1	1	N		


Note: Please discuss with Eaton sales team before placing any orders for these set of products.

N - Normal; O - On Order

Effective 15th March, 2021

Type - TSM / TST / TSL


Fuse link with Offset Tags Double Slot.

415 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class	
	C1	Centre Tag	415	355	TSM355	1140	1	1	O	EF
		Double Slot	415	400	TSM400	1140	1	1	O	
	C2	Centre Tag	415	450	TST450	1230	1	1	O	FF
		Double Slot	415	500	TST500	1230	1	1	O	
	C3	Centre Tag	415	560	TSL560	1825	1	1	O	SR11
		Double Slot	415	630	TSL630	2310	1	1	N	
			415	710	TSL710	2310	1	1	O	
			415	750	TSL750	2315	1	1	O	
		415	800	TSL800	2450	1	1	N		

N - Normal; O - On Order

Type - TM \ TTM \ TLM


Fuse Links with Centre Tags Double Slot

660 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class	
	C1	Centre Tag	660	355	TM355	1400	1	1	O	SP11
		Double Slot	660	400	TM400	1450	1	1	O	
	C2	Centre Tag	660	450	TTM450	1630	1	1	O	R11
		Double Slot	660	500	TTM500	1700	1	1	O	
			660	560	TTM560	1905	1	1	O	
	C3	Centre Tag	660	630	TLM630	2490	1	1	O	GF
		Double Slot	660	710	TLM710	2490	1	1	O	
			660	750 & 800	TLM750 & 800	2490	1	1	O	

N - Normal; O - On Order

Type TIA \ TIS \ TCP \ TFP


Fuse with Offset Tags (2 hole fixing - Bolted)

660 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class	
	A2	OFFSET TAG	660	2	TIA2	95	10	10	O	H07
		CLOSED SLOT	660	4	TIA4	95	10	10	O	
			660	6	TIA6	95	10	10	N	
			660	10	TIA10	95	10	10	N	
			660	16	TIA16	95	10	10	N	
			660	20	TIA20	95	10	10	N	
			660	25	TIA25	95	10	10	N	
			660	32	TIA32	95	10	10	N	
	A3	OFFSET TAG	660	36	TIS36	150	10	10	N	K07
		CLOSED SLOT	660	40	TIS40	150	10	10	O	
			660	50	TIS50	160	10	10	N	
			660	63	TIS63	160	10	10	N	
	A4	OFFSET TAG	660	80	TCP80	280	6	6	N	L14
		CLOSED SLOT	660	100	TCP100	280	6	6	N	
			660	125	TFP125	535	3	3	O	M14
			660	160	TFP160	535	3	3	O	
			660	200	TFP200	535	3	3	O	

Note: Please discuss with Eaton sales team before placing any orders for these set of products.

Effective 15th March, 2021

Fuse with Central Tags

660 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class
	B1	CENTRE TAG	660	80	TC80	300	6	6	O
		SINGLE SLOT	660	100	TC100	300	6	6	N
			660	80	102TC80	300	6	6	O
			660	100	102TC100	310	6	6	O
	B3	CENTRE TAG	660	125	TF125	510	3	3	N
		SINGLE SLOT	660	160	TF160	520	3	3	N
			660	200	TF200	525	3	3	N
			660	250	TF250	490	3	3	N
	B3	CENTRE TAG	660	250	TKF250	910	1	1	N
		SINGLE SLOT	660	315	TKF315	910	1	1	N

N - Normal; O - On Order

Moulded Fuse Holder and Fuse Base for 415V AC Circuit

Type - SC (Safe Clip)

IS / BS Size Reference	Description	Connection Type	Suitable for Fuse Type	Rating (Amps)	Cat. No. / Type	Rated Voltage (Volts)	MRP (₹)	Pack Qty.	MOQ	Delivery Class
E1	-	Front	SS	20	SC20H	415	115	10	10	O
F1	-	Front	NS	32	SC32H	415	-	10	10	O
F2	-	Front	ES	63	SC63H	415	350	10	10	N

N - Normal; O - On Order

Fuse Fittings for LV BS Type of Fuses

Type - NS & SM: Moulded Fuse Holder

IS / BS Size Reference	Description	Connection Type	Suitable for Fuse Type	Rating (Amps)	Cat. No. / Type	Rated Voltage (Volts)	MRP (₹)	Carton Qty.	MOQ	Delivery Class
F1		Front	NS (upto 32A)	32	NSH32	415	120	10	10	N
		Back	NS (upto 32A)	32	NSP32	415	170	10	10	N
		Busbar	NS (upto 32A)	32	NSB32	415	150	10	10	N
A2	Offset Bolted	Front	TIA / TSA	32	SM32H	660	275	10	10	N
		Busbar	TIA / TSA	32	SM32B	660	350	10	10	N
A3	Offset Bolted	Front	TIA / TSS	63	SM63H	660	360	10	10	N
		Busbar	TIA / TSS	63	SM63B	660	400	10	10	N
A4	Offset Bolted	Front	TCP / TSD	125	SM125H	660	905	5	10	N
		Busbar	TCP / TSD	125	SM125B	660	1000	5	10	N

N - Normal; O - On Order

Moulded Fuse Holder and Fuse Base for 415V AC Circuit

IS / BS Size Reference	Description	Connection Type	Suitable for Fuse Type	Rating (Amps)	Cat. No. / Type	Rated Voltage (Volts)	MRP (₹)	Pack Qty.	MOQ	Delivery Class
00	-	-	NH00	160	ISG160	500	310	3	3	N
1	-	-	NH1	250	ISG250	660	800	3	3	N
2	-	-	NH2	400	ISG400	660	1000	3	3	N
3	-	-	NH3	630	ISG630	660	1190	3	3	N

Note: Please discuss with Eaton sales team before placing any orders for these set of products.

N - Normal; O - On Order

Effective 15th March, 2021

Type GSMJ/GSMK/SMK Ultra-fast Acting Multi Body Fuselink for

Fuselink for Diode & Thyristor Protection

800 \ 1000 Vac	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class
	800	63	GSMJ63	720	3	3	O
	800	120	GSMJ120	1670	1	1	O
	800	180	GSMJ180	2510	2	2	O
	800	240	GSMJ240	3270	1	1	O
	800	300	GSMJ300	3745	1	1	O
	800	350	GSMJ350	4925	1	1	O
	800	400	GSMJ400	5780	1	1	O
	800	460	GSMJ460	6350	1	1	O
	800	520	GSMJ520	7030	1	1	O
	800	580	GSMJ580	8420	1	1	O
	800	630	GSMJ630	9420	1	1	O
	800	680	GSMJ680	10415	1	1	O
	800	800	GSMJ800	13415	1	1	O
	800	1000	GSMJ1000	16775	1	1	O
	800	1200	GSMJ1200	19125	1	1	O
	1000	63	GSMK63	365	3	3	O
	1000	120	GSMK120	1755	2	2	O
	1000	180	GSMK180	2570	2	2	O
	1000	240	GSMK240	3675	1	1	O
	1000	300	GSMK300	4210	2	2	O
	1000	350	GSMK350	5210	2	2	O
	1000	400	GSMK400	6280	1	1	O
	1000	460	GSMK460	6990	1	1	O
	1000	520	GSMK520	8490	1	1	O
	1000	580	GSMK580	9135	1	1	O
	1000	630	GSMK630	10205	1	1	O
	1000	680	GSMK680	11205	1	1	O
	1000	800	GSMK800	13670	1	1	O
	1000	1000	GSMK1000	-	1	1	O
	1000	1200	GSMK1200	21690	1	1	O
	-	2000	SMK-GSM120-1200	355	1	1	O
	-	400	954GSMJ400	6530	1	1	O
	1000	500	RGS500	5310	1	1	O

N - Normal; O - On Order

Semiconductor Fuse Accessories

Cat. No. / Type	Rated Voltage (Volts)	MRP (₹)	Pack Qty.	MOQ	Delivery Class
TI300-BI	-	380	20	20	N
TI600-BI	-	400	20	20	N
TI1200-BI	-	410	20	20	N
TI2000-BI	-	460	20	20	N

Note: Please discuss with Eaton sales team before placing any orders for these set of products.

N - Normal; O - On Order

Effective 15th March, 2021

British Standard Type Range of Fuses for use in Motor Circuits

3.6 / 7.2 KV	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class
	3.6	5	K3PGX5	4325	1	1	O
	3.6	10	K3PGX10	4325	1	1	O
	3.6	16	K3PGX16	4325	1	1	O
	3.6	20	K3PGX20	4325	1	1	O
	3.6	25	K3PGX25	4325	1	1	O
	3.6	32	K3PGX32	4325	1	1	O
	3.6	40	K3PGX40	4325	1	1	O
	3.6	50	K3PGX50	4410	1	1	O
	3.6	63	K3PGX63	4420	1	1	O
	3.6	80	K3PGX80	4420	1	1	O
	3.6	100	K81PEX100	7525	1	1	O
	3.6	160	K81PEX160	8440	1	1	N
	3.6	200	K81PEX200	9525	1	1	O
	3.6	250	K81PEX250	10930	1	1	N
	3.6	315	K81PEX315	13215	1	1	O
	3.6	350	K81PEX350	15245	1	1	N
	7.2	50	K81SVX50	9335	1	1	O
	7.2	63	K81SVX63	9425	1	1	N
	7.2	80	K81SVX80	10270	1	1	N
	7.2	100	K81SVX100	11800	1	1	N
	7.2	125	K81SVX125	12970	1	1	N
	7.2	160	K81SVX160	13210	1	1	O
	7.2	200	K81SVX200	15420	1	1	O
	7.2	250	K81SVX250	18940	1	1	O
	7.2	50	KSVX50	9870	1	1	O
	7.2	63	KSVX63	9870	1	1	O
	7.2	80	KSVX80	10060	1	1	O
	7.2	100	KSVX100	10150	1	1	O
	7.2	125	KSVX125	10245	1	1	O
	7.2	160	KSVX160	11595	1	1	O
	7.2	200	KSVX200	13215	1	1	O
	7.2	250	KSVX250	15105	1	1	O

N - Normal; O - On Order

Cross Reference Chart

LV BS FUSES

Clip on Type

BS Size	Bussmann	Bussmann
E1	SSD	SS
F1	NSD	NS
F2	ESD	ES

Bolted Type - 660V Range

BS Size	Bussmann	Bussmann
A2	HO7-660	TIA
A3	KO7-660	TIS
A4	L14-660	TCP
-	M14-660	TFP
B1	LO9-660	TC
B2	MO9-660	TF
B3	NO9-660	TKF
B4	PO9-660	TMF
C1	P11-660	TM
C2	R11-660	TTM

HIGHSPEED BS88 FUSES

Bussmann		Bussmann		Brand 4	
TYPE	RANGE	TYPE	RANGE	TYPE	RANGE
240 Volts Range					
LCT	6-20	GSA	5-20	2.5URE	6-20
LET	25-180	GSA	25-100	2.5URGS/URZ	25-100
LMT	160-450	GS450	150-250	2.5URGG	150-250
LMT	160-450	GS450	300-500	2.5URGH	300-500
LMMT	400-900	--	--	--	--
690 Volts Range					
CT	6-20	GSB	5-20	6.6URE	6-20
ET	25-80	GSB	25-75	6.6URS	25-75
ET	25-80	GSG1000	16-55	6.6URS	16-55
EET	90-160	GSG1000	75-150	6.6URT	75-140
FM	180-350	GS1000	100-200	6.6URGL/UR	100-250
MT	160-355	GS1000	100-200	6.6URGL/UR	100-250
MMT	180-710	GS1000	300-500	--	--
MMT	180-710	GSG1000	175-350	6.6URGM/URU	175-350

HV FUSES

Appl. used in	Bussmann	Bussmann	Appl. used in	Bussmann	Bussmann
Air	ADGHC	H2CAS	VT/PT	ABCNS	5xVTF
Air	ADOH6 / ADOH7	K3PGX	Motor Ckt.	WDOHS	K3PGX
Air	BFGHD	H2CAS	Motor Ckt.	WDFMO/ WFFMO	K81PEX/ K81PRX
Air	BDGHC	H2CAS	Motor Ckt.	WKFMO	K82PEX
Air	AHGHC	H2CAS	Motor Ckt.	WFQMO	K81SVX / K81SRX
Oil	OHGMA/OLGMA	KEMXO	Motor Ckt.	WKQMO	K82SSX
Oil	OEFMA/OHFMA	KEBXO			
VT/PT	ABWNA	VTF			
VT/PT	ABCNA	VTF			

Bolted Type - 550V Range

BS Size	Bussmann	Bussmann*
A1	NITD	NIT
A2	AAO	TSA
A3	BAO*	TSS
A4	CEO	TSD
-	OSD	TSDS
C2	FF	TST
C3	GF	TLM
-	GG	TLT

*Fuses are 415V rated

Bolted Type - 415V Range

BS Size	Bussmann	Bussmann
-	EITD	EIT
-	DEO	TSFP
B1	CD	TSDC
B2	DD	TSF
B3	ED	TSF/TSK
B4	ED	TSK/TSM
-	SN11(S)	TSMS
-	SP11(S)	TSTS
-	SR11(S)	TSLS
C1	EF	TSM
-	SR11	TSL

LV NH DIN FUSES

Size as per IEC	Bussmann	Bussmann	Brand 2	Brand 3
400 / 415 Volts				
SIZE C00/000	NHG000B-400	NA	NA	
SIZE 00	NHG00B-400	NA	NA	HNSIZE00
SIZE 1	NHG01-400 / NHG1-400	NA	NA	HN SIZE1
SIZE 2	NHG02-400 / NHG2-400	NA	NA	HN SIZE2
SIZE 3	NHG03-400 / NHG3-400	NA	NA	HN SIZE3
500 Volts				
SIZE C00/000	NHG000B	VSA	3NA38	NA
SIZE 00	NHG00B	VSB	3NA10	NA
SIZE 1	NHG01 / NHG1	VSF	3NA12	NA
SIZE 2	NHG02 / NHG2	VSK	3NA13	NA
SIZE 3	NHG03 / NHG3	VST	3NA14	NA
660 / 690 Volts				
SIZE 00	NH00G - 690	NA	NA	NA
SIZE 1	NH1G-690	NA	NA	NA
SIZE 2	NH2G- 690	NA	NA	NA
SIZE 3	NH3G- 690	NA	NA	NA

LV NH DIN Bases

Suitable for Size	Bussmann		Bussmann	Brand 2	Brand 3
	Type	Amps			
C00/000/00	SB 00 - PB	160	ISG160	3NH3030 / 3032	HB 125
01/1	SB 1 - D	250	ISG250	3NH3230	HB 250
02/2	SB 2 - D	400	ISG400	3NH3330	HB 800

LV BS88 Bases

BS Size	Bussmann			Bussmann	Brand 2	Brand 3
	Fuse Types	Type	Amps			
Old Type						
F1	NSD / FO6	FA	32	NSH	NA	HD32H
F1	NSD / FO6	FB	32	NSP	NA	HD32P
F1	NSD / FO6	FD	32	NSB	NA	HD32B
A2	HO7 / AAO / FO7	HA	32	SM32H	NA	HK32H
A2	HO7 / AAO / FO7	HD	32	SM32B	NA	HK32B
A3	TO7 / BAO / KO7	KA	63	SM63H	NA	HK63H
A3	TO7 / BAO / KO7	KD	63	SM63B	NA	HK63B
A4	L14 / CEO / DEO@ / M14@ / KL14	LA	125	SM125H	NA	HK125H
A4	L14 / CEO / DEO@ / M14@ / KL14	LD	125	SM125B	NA	HK125B
New Safeloc Type						
F1	NSD / FO6	NNSF	32	SC32H	3NW 32	NA
					NNSF	
F2	ESD	ENSF	63	SC63H	NA	NA
New Range - Cam Master						
A2	HO7 / AAO / FO7	CM32F	32		3NW CM32F9	NA
A3	TO7 / BAO / KO7	CM63F	63		3NW CM63F9	NA
	OSD	CM100F	100		3NW CM100F9	NA

@ - upto 125A only

- ❖ The chart is intended for guidance purpose only, considering physical replacability
- ❖ In identical operating condition, Bussmann fuse can be used to achieve similar performance.
- ❖ Other makes may not necessarily have identical performance. Relevant data like rated voltage, breaking capacity, let thru' current, etc also need to be evaluated while evaluating fuse performance.

Effective 15th March, 2021

Global Technology Regional Solutions

Electrical standards and certifications

PRICE :

- For items marked (#), prices available on request.
- Prices are subject to change without prior notice.
- This Price list supersedes all previous Price Lists.
- Price prevailing at the time of dispatch will only be applicable.
- For prices of any special products not listed here, please contact us
- Prices are Ex-Pondicherry, exclusive of packing, forwarding, freight & insurance.
- Company reserves the right to issue amendments which may arise due to any errors in the Price List

TAXES AND DUTIES :

- All prices in this document are inclusive of GST.

Order Postponement or cancellation is not allowed.
For all shipments, orders to be in multiples of the carton quantity.
All prices are in Rupees (₹) per individual item unless stated otherwise.

This price list is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Eaton reserves the right, without notice, to change design or construction of any products or discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this price list. Once a product has been selected, it should be tested by the user in all possible applications. The information contained in this price list is correct at the time of publication, but we reserve the right to supply products differing in construction or performance.

Offices Across India

Mumbai
EL Floor, VITS Luxury Business Hotel
Andheri Kuria Road., Andheri (East)
Mumbai - 400 059
Tel: +91 22 45110100
Mobile: +91 9833014167, +91-9820432943

Chennai
No. 36, Nehru Street,
Old Mahabhalipuram Road,
Sholinganallur, Chennai-600 119, India
Tel: +91 44 66501544/45
Mobile: +91 9840326095

Delhi
Unit A1 & B1, 3rd Floor, TDI Centre
Plot No. 7, Jasola, New Delhi-110025
Tel: +91 11 45851800
Mobile: +91 9811086586

Bangalore
4th Floor, Prestige Atrium, Central Street
Bangalore 560001, India
Tel: +91 80 49012200
Mobile: +91 9916514234,
+919845175290

Kolkata
Mobile: +91 8334008313

Pune
145, Off. Mumbai - Pune Road
Pimpri, Pune-411018
Mobile: +91 9320141508

Vadodara
Mobile: +91 9879355485

Coimbatore
Mobile: +91 9344893165

Hyderabad
Mobile: +91 9533423461

Ahmedabad
Mobile: +91 9879355485

Chandigarh
Mobile: +91 9501177119

Indore
Mobile: +91 9501177119

Cochin
Mobile: +91 9344893165



India Head Office
Eaton Power Quality Pvt. Ltd.
2, EVR Street, Sedarpet
Industrial Estate
Pondicherry-605111
Tel: +91 413 2672000
Enquiries - EatonElectricalIndia@eaton.com

www.eaton.com
© 2021 Eaton Corporation All Rights Reserved India

Regional E-mails

For E-mail, prefix cityname to buss____@eaton.com
Example, for Delhi, write - bussmann**delhi**@eaton.com